


Female Adapter

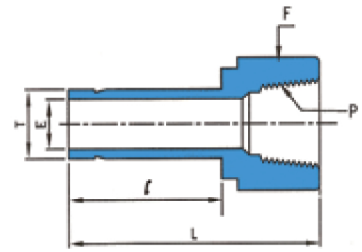

Fractional Range

Part No	Tube O.D. T inches	P* (NPT)	E min	Width Across Flat	l	L
				F		
				inches		
2ATPF2	1/8	1/8	1.77	9/16	13.45	31.50
2ATPF4	1/8	1/4	1.77	3/4	13.45	35.33
3ATPF2	3/16	1/8	3.04	9/16	14.20	32.00
3ATPF4	3/16	1/4	3.04	3/4	14.20	35.81
4ATPF2	1/4	1/8	4.57	9/16	15.75	33.02
4ATPF4	1/4	1/4	4.57	3/4	15.75	37.10
4ATPF6	1/4	3/8	4.57	7/8	15.75	39.37
4ATPF8	1/4	1/2	4.57	1 1/16	15.75	42.50
5ATPF2	5/16	1/8	6.35	9/16	16.80	34.29
5ATPF4	5/16	1/4	6.35	3/4	16.80	37.59
6ATPF2	3/8	1/8	7.11	9/16	17.50	34.29
6ATPF4	3/8	1/4	7.11	3/4	17.50	38.10
6ATPF6	3/8	3/8	7.11	7/8	17.50	40.38
6ATPF8	3/8	1/2	7.11	1 1/16	17.50	46.73
8ATPF4	1/2	1/4	9.90	3/4	23.20	43.43
8ATPF6	1/2	3/8	9.90	7/8	23.20	45.46
8ATPF8	1/2	1/2	9.90	1 1/16	23.20	51.80
10ATPF6	5/8	3/8	12.70	7/8	24.70	48.26
10ATPF8	5/8	1/2	12.70	1 1/16	24.70	53.84
10ATPF12	5/8	3/4	12.70	1 1/4	24.70	55.37
12ATPF8	3/4	1/2	14.98	1 1/16	24.70	52.83
12ATPF12	3/4	3/4	14.88	1 1/4	24.70	54.86
12ATPF16	3/4	1	14.98	1 5/8	24.70	58.42
14ATPF12	7/8	3/4	17.27	1 1/4	26.70	57.15
16ATPF12	1	3/4	20.06	1 1/4	31.70	60.70
16ATPF16	1	1	20.06	1 5/8	31.70	64.26